


Hot Dipped Galvanised Pipe

Fencing, Handrails, Barricades



we'll see it through




Orrcon Steel now offers more...



Product Range

Orrcon Steel's Hot Dipped Galvanised pipe is sourced from pre qualified suppliers that meet our stringent product performance and process capability requirements. The 7200mm lengths are subject to enquiry and lead times apply. The product complies to AS 1450 and AS 4792 and has a coating mass of 300 g/m².

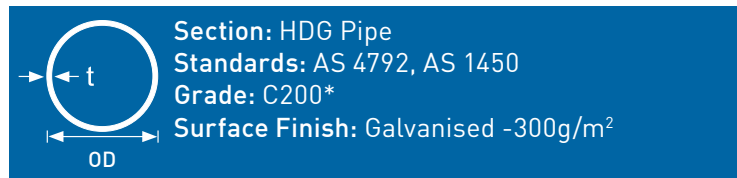

Size	OD (mm)	Class	Nom Thickness (mm)	Lengths /pack	Nom Linear Mass (kg/m)	Length (mm)	Mass/Pack (tonnes)
6500mm Lengths Standard							
15NB	21.3	M	2.6	91	1.20	6500	0.710
20NB	26.9	XL	2.0	91	1.23	6500	0.730
20NB	26.9	XL	2.0	91	1.23	7200	0.800
20NB	26.9	L	2.3	91	1.40	6500	0.830
20NB	26.9	M	2.6	91	1.56	6500	0.920
20NB	26.9	H	3.2	91	1.87	6500	1.110
25NB	33.7	XL	2.0	91	1.56	6500	0.924
25NB	33.7	XL	2.0	91	1.56	7200	1.024
25NB	33.7	L	2.6	91	1.99	6500	1.180
25NB	33.7	M	3.2	91	2.41	6500	1.420
25NB	33.7	H	4.0	91	2.93	6500	1.730
32NB	42.4	XL	2.0	61	1.99	6500	0.790
32NB	42.4	XL	2.0	61	1.99	7200	0.875
32NB	42.4	L	2.6	61	2.55	6500	1.011
32NB	42.4	M	3.2	61	3.09	6500	1.230
32NB	42.4	H	4.0	61	3.79	6500	1.500
40NB	48.3	XL	2.3	61	2.61	6500	1.030
40NB	48.3	XL	2.3	61	2.61	7200	1.150
40NB	48.3	L	2.9	61	3.25	6500	1.290
40NB	48.3	L	2.9	61	3.25	7200	1.430
40NB	48.3	M	3.2	61	3.56	6500	1.410
40NB	48.3	M	3.2	61	3.56	7200	1.560
40NB	48.3	H	4.0	61	4.37	6500	1.730

NOTE:

- Non standard lengths are available, subject to enquiry.
- *Product conformance letter provided upon request. Higher grades may be available. Please contact your local Orrcon Steel Representative for further information.

Hot Dipped Galvanised Components:

- Post Caps
- Tee joints
- Fixed corners
- Cross joints
- Oval flanges
- Plus more accessories as required.

Size	OD (mm)	Class	Nom Thickness (mm)	Lengths /pack	Nom Linear Mass (kg/m)	Length (mm)	Mass/Pack (tonnes)
6500mm Lengths Standard							
50NB	60.3	XL	2.3	37	3.29	6500	0.791
50NB	60.3	XL	2.3	37	3.29	7200	0.876
50NB	60.3	L	2.9	37	4.10	6500	0.987
50NB	60.3	M	3.6	37	5.03	6500	1.210
50NB	60.3	H	4.5	37	6.19	6500	1.489
65NB	76.1	XL	2.3	37	4.18	6500	1.010
65NB	76.1	L	3.2	37	5.75	6500	1.380
65NB	76.1	M	3.6	37	6.43	6500	1.550
65NB	76.1	H	4.5	37	7.94	6500	1.910
80NB	88.9	XL	2.6	19	5.53	6500	0.683
80NB	88.9	L	3.2	19	6.76	6500	0.835
80NB	88.9	M	4.0	19	8.37	6500	1.034
80NB	88.9	H	5.0	19	10.34	6500	1.277
90NB	101.6	XL	2.6	19	6.34	6500	0.784
90NB	101.6	L	3.2	19	7.76	6500	0.959
90NB	101.6	M	4.0	19	9.62	6500	1.188
90NB	101.6	H	5.0	19	11.91	6500	1.470
100NB	114.3	XL	3.2	19	8.76	6500	1.080
100NB	114.3	L	3.6	19	9.82	6500	1.210
100NB	114.3	M	4.5	19	12.18	6500	1.500
100NB	114.3	H	5.4	19	14.50	6500	1.790
125NB	139.7	XL	3.0	13	10.11	6500	0.854
125NB	139.7	L	3.5	13	11.75	6500	0.993
125NB	139.7	M	5.0	13	16.60	6500	1.403
125NB	139.7	H	5.4	13	17.88	6500	1.511
150NB	165.1	XL	3.0	10	11.99	6500	0.779
150NB	165.1	L	3.5	10	13.94	6500	0.906
150NB	165.1	M	5.0	10	19.73	6500	1.283
150NB	165.1	H	5.4	10	21.26	6500	1.382

CLASS DEFINITIONS:

- H - Heavy, M - Medium, L - Light, XL - Extra Light



1300 ORRCON (677 266) | WWW.ORRCONSTEEL.COM.AU

we'll see it through

